



# REGOMS PRODUCT DATASHEET

---

SUBMERSIBLE PUMP

## SUBMERSIBLE PUMP





FOR ILLUSTRATION PURPOSE ONLY

The **Submersible Pump** is a reliable dewatering pump with a capacity of 850 GPM and a maximum head of 65.5 m. Its compact slim-line design makes it ideal for confined spaces, while the cast chromium steel impeller and rubber-coated wear parts ensure long life and durability. The pump is easy to operate, suitable for ambient temperatures from -20°C to +40°C, and comes with a weatherproof control panel and all necessary accessories for straightforward setup and maintenance.

PUMP SPECIFICATION	CONTROL PANEL (WEATHERPROOF – NON-EXPLOSION PROOF)
<ul style="list-style-type: none"> <li>• <b>BRAND &amp; MODEL</b> : GODWIN GSP300HH</li> <li>• <b>CAPACITY</b> : 850 GPM</li> <li>• <b>VOLTAGE</b> : 380-415 V, 3 Phase @ 50 Hz</li> <li>• <b>Max. Head</b> : 65.5 m</li> <li>• <b>Pump Weight</b> : 161 kg (without cable)</li> </ul>	<ul style="list-style-type: none"> <li>• <b>MCCB</b> : 3P 160A</li> <li>• <b>CONTRACTOR</b> : 3P 60A x 3 pcs</li> <li>• <b>TIME RELAY</b> : 30 sec</li> <li>• <b>OVERLOAD</b> : 3P 55A</li> <li>• <b>TRANSFORMER</b> : 100VA</li> <li>• <b>BOX DIMENSION</b> : L 2'3" x W 1'3" x H 4'5"</li> <li>• <b>BOX WEIGHT</b> : 50 kg</li> </ul>

ACCESSORIES	
HOSES	Spring Hose 6" x 30 m length with #150 flanges
	<b>Cable (Armored)</b> : 4c x35mm <sup>2</sup> x 100 m (with lugs at one end)
	<b>Cable (Soft)</b> : 3c x 4 mm <sup>2</sup> x 30 m (with 4P 32A plug)
	<b>Cable (Soft)</b> : 3c x 2.5 mm <sup>2</sup> x 30 m (with 4P 32A plug)

## Pump Performance

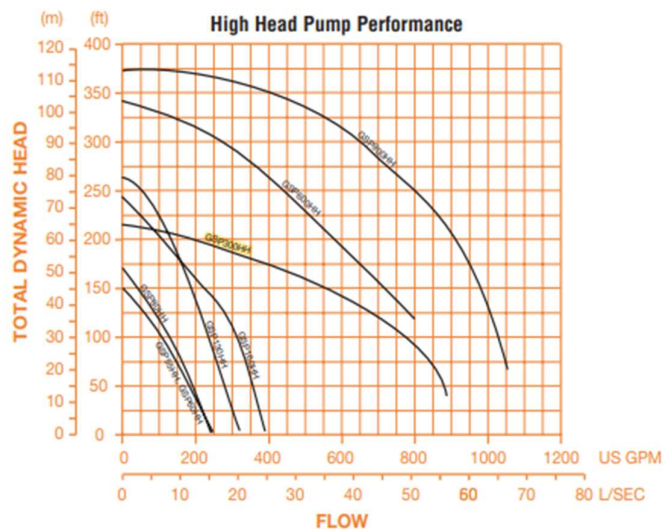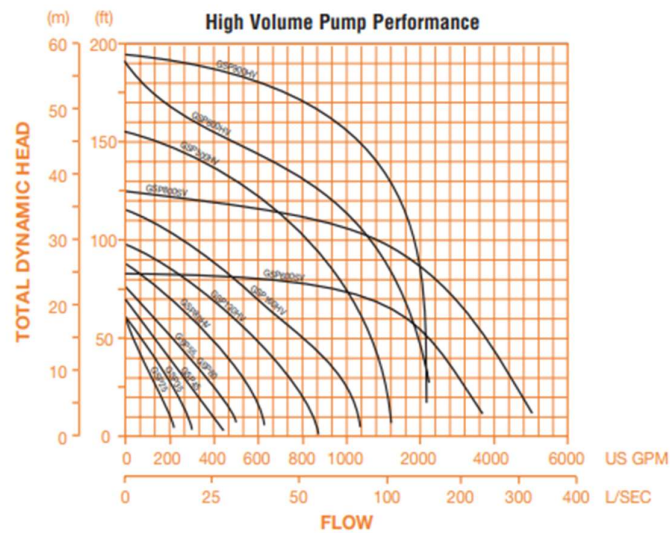

## Features & Benefits

- Compact, slim-line, top discharge design to fit into confined spaces
- Dual voltage junction chamber for convenient voltage changeover in the field
- Dual phase available for electrical supply flexibility (selected models)
- Tandem mechanical seals – silicon carbide on silicon carbide primary seal – for dry running and extra protection against leakage
- Cast chromium steel impeller and heavy duty rubber coated adjustable wear parts for maximum pump life

For a quotation and detailed pricing, please contact our sales team:

**REGOMS Engineering (M) Sdn. Bhd.**

No. 10-1, Jalan 13/48A, The Boulevard  
Shop Office Sentul Raya, Sentul Selatan,  
51000 KL. WP.

Malaysia

Tel: +603 2858 2600

Email: [sales1@regoms.com](mailto:sales1@regoms.com)

**REGOMS Australia Pty Ltd.**

Level 1, 16, McDougall Street,  
PO Box 1279, MILTON QLD 4064  
Australia

M: +614 0008 4977

F: +617 3198 2401

E: [sri@regoms.com](mailto:sri@regoms.com)

<https://www.regoms.com>

*Any modification of the content, duplication or reprinting of this datasheet, as well as any distribution to third parties - even in parts - shall require the express written approval of REGOMS.*